



電動平面砂輪機

GA5091 / GA5092 / GA5095



▶ GA5091 / 5092
(滑動開關)



▶ GA5095(扳機開關)

AFT

減少反彈危險

GA5091

5段撥盤變速
(僅 GA5091)


第二代超級連結系統

滑動開關

▶ GA5092

扳機開關
保護鎖定桿

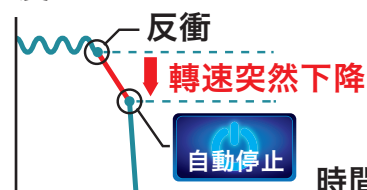
▶ GA5095

免工具安裝
或拆卸砂輪罩
按下鎖定桿後
轉動砂輪罩**AFT**

減少反彈危險

注意：並非防止反彈發生

速度




時間

型號	砂輪直徑	手圍	剎車	撥盤變速	緩啟動	定速	防止意外啟動
GA5091	125mm	205mm	●	●	●	●	●
GA5092		205mm	×	×			
GA5095		207mm					

■ 適用配件(標配依下方附件為主)

125mm

夾式砂輪罩
切斷砂輪片用
199710-5
(選購)集塵罩
適用於研磨
191W05-0
(選購)集塵罩
適用於金剛石切斷鋸片
191G06-2
(選購)把手
194514-0
(選購)內法蘭
192227-7
(選購)免工具
鎖緊螺母 M14
195354-9
(選購)

電動平面砂輪機		GA5091X03 262W	GA5092X03 262W	GA5095X05 262W
定速 緩啟動 雙重絕緣 連結集塵 防止意外重啟 無段變速(僅GA5091) 煞車(僅GA5091)	砂輪直徑	125 mm	125 mm	
	回轉速	2,800 - 11,500 rpm	11,500 rpm	
	耗電量	1,520W	1,520W	
	尺寸	349 x 140 x 129 mm	326 x 140 x 123 mm	
	重量	2.8 - 4.0 kg	2.6 - 3.8 kg	2.7 - 3.8 kg
GA5091X03 附件：扳手、把手、砂輪片、安全蓋				
GA5092X03 附件：扳手、把手、砂輪片、安全蓋				
GA5095X05 附件：扳手、把手、安全蓋				

台灣牧田股份有限公司
www.makita.com.tw

f 牧田FB 台灣牧田 搜尋

2024-01-V2