



電動起子電鑽 / 電動震動起子電鑽
DF0300 10mm(3/8") / HP0300 10mm(3/8")



最大扭力
56N·m

輕巧機身、快速夾頭設計

DF0300



HP0300




DF0300 : 220mm
HP0300 : 235mm

機械式兩段變速

高速：0 - 1,500 rpm
低速：0 - 450 rpm

易於裝卸鑽頭
10mm 雙套筒
快速夾頭

20 段
扭力調整

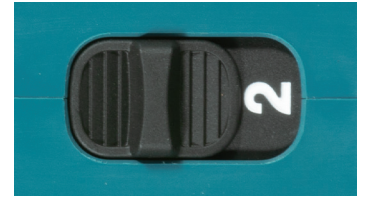

柔軟舒適的橡膠握把
更好控制
降低疲勞感



無段變速
通過觸發器
進行變速控制



HP0300



DF0300



DF0300



DF0300



DF0300



HP0300

僅限
HP0300

電動起子電鑽

DF0300 10mm(3/8")

電動震動起子電鑽

HP0300 10mm(3/8")

- 雙重絕緣
- 無段變速
- 正逆轉
- 機械式兩段變速
- 快速夾頭
- 扭力設定20段

	DF0300	HP0300
鑽孔能力	鐵工 10mm / 木工 28 mm	石工 8 mm / 鐵工 10mm / 木工 28 mm
回轉速 (RPM)	高速 0 - 1,500 低速 0 - 450	高速 0 - 1,500 低速 0 - 450
打擊速 (BPM)	-	高速 0 - 22,500 低速 0 - 6,750
扭力	硬 56 N·m / 軟 21 N·m	硬 56 N·m / 軟 21 N·m
輸出功率	320W	320W
尺寸 (長 x 寬 x 高)	220 x 67 x 206 mm	235 x 67 x 206 mm
重量	1.2 kg	1.3 kg

配件：請依照實際機種為主



台灣牧田股份有限公司
www.makita.com.tw

牧田FB 台灣牧田 搜尋